11 Publication number:

0 151 834

A1

12

EUROPEAN PATENT APPLICATION

Application number: 84300689.1


(51) Int. Cl.4: A 61 F 2/60

(2) Date of filing: 03.02.84

- Date of publication of application: 21.08.85 Bulletin 85/34
- Designated Contracting States:
 DE FR IT NL SE

- (7) Applicant: J.E. HANGER & COMPANY LIMITED Roehampton Lane Roehampton London SW15 5PL(GB)
- (2) Inventor: May, Denis Ronald William Baronsmead Wayneflete Tower Avenue Esher Surrey(GB)
- (2) Inventor: Hiddleston, James Norman 71 Pursers Cross Road Fulham London, SW6(GB)
- (24) Representative: Cole, Paul Gilbert et al, Hughes Clark Andrews & Byrne 63 Lincoln's Inn Fields London WC2A 3JU(GB)

- (4) An artificial leg for occasional use.
- (a) An inflatable lower limb prosthesis comprises an outer cover (10) of relatively inextensible material defining the shape of a leg prosthesis and having a pad (12) of rigid material at its lower end defining the shape of a foot. An inner member of independently inflatable compartments welded together comprises a shin compartment (16) contacting the rigid pad and of upwardly convergent profile, an inner spacer compartment (18) between the upper end of the shin compartment (16) and the patient's stump and an annular socket compartment (24) that surrounds the patient's stump and extends downwardly in overlapping relation around the upper end of the shin compartment (16) to resist bending of the prosthesis at the false joint at the patient's stump.



AN ARTIFICIAL LEG FOR OCCASIONAL USE

The present invention relates to an inflatable artificial leg.

The use of inflatable splints to treat lower limb injury such as skiing accidents is described in UK Patent Specifications Nos.970890, 1103181 and 1171361 and in USA Re 26046. But the purpose of such splints when applied to a lower limb is to immobilise it while the patient is transported to hospital and they neither are nor are intended as capable of supporting the weight of the patient and assisting walking.

It is an object of the invention to provide a lower limb prosthesis for occasional use by amputees eg. in showers that can be collapsed into a very compact state.

The invention provides a lower limb prosthesis comprising means defining a ground contacting lower surface, inflatable stump support means extending upwardly from the lower surface and inflatable socket means for surrounding the stump and so connected to said support

15

means to provide stiff support between the stump and the ground.

The invention also provides an inflatable lower limb for use by amputees comprising: an outer cover of relatively inextensible material defining the shape of the leg and having a pad of rigid material at its lower end defining the shape of the foot; and an inner member of independently inflatable compartments welded together comprising a shin compartment contacting the rigid pad and being of upwardly convergent profile, an inner spacer compartment between the upper end of the shin compartment and the patient's stump and an annular socket compartment that surrounds the patient's stump and the shin compartment and extends downwardly in overlapping relation around the upper end of the shin compartment to resist bending of the limb at the false joint at the patient's stump.

The inner member and the outer cover are both of waterproof material and it is envisaged that one main use of the lower limb will be when the wearer wishes to take a shower. Because it is wholly of flexible plastics sheet or textile material except for the rigid pad, it may be rolled up into a very compact form and can be readily packed into the wearer's luggage.

An embodiment of the invention will now be described by way of example only with reference to the accompanying drawing which is a diagrammatic vertical sectional view of an inflatable artificial leg.

25

In the drawing, the shape of the leg is defined by
an outer casing 10 of relatively inextensible material
such as a polyurethane coated woven nylon fabric. At its
lower end is a base pad 12 of rigid material sealed into a
water-tight pocket bonded to the outer casing 10. A sole
14 of rubberised anti-skid sheet material is bonded to the
base of the outer cover.


In outer casing 10 fits an inflatable inner member formed of three independent compartments welded together.

A shin compartment 16 fits immediately above the baseplate 12 and tapers inwardly as shown. Above the shin compartment is an inner spacer 18 that may be inflated to a desired height appropriate to the length of the wearer's stump 22. An annular socket compartment 24 surrounds the stump 22, the inner spacer 18 and the upper end of the shin compartment which it overlaps as shown. The reason for this overlap is to avoid the effects of the false joint between the inflatable leg and the wearer's stump which if insufficiently supported by a rigid tube structure is prone to collapse.

In use the wearer first inflates the shin compartment 16 through tube 26. Then he inserts his stump into the socket compartment 24 and inflates the inner spacer compartment until it reaches the required height to support his stump. Finally he inflates the socket compartment 24. After use, air is expelled from the three compartments and the leg can be rolled up about the base pad 12 to a small size that is convenient for packing.

CLAIMS:

- 1. A lower limb prosthesis comprising means defining a ground contacting lower surface (12, 14), inflatable stump support means (16) extending upwardly from the lower surface (12, 14) and inflatable socket means (24) for surrounding the stump and so connected to said support means (16) to provide stiff support between the stump and the ground.
- 2. A lower limb prosthesis according to Claim 1 comprising means defining an inflatable shin member (16) and means defining an inflatable stump socket (24).
- 3. An inflatable lower limb for use by amputees comprising: an outer cover (10) of relatively inextensible material defining the shape of the leg and having a pad (12) of rigid material at its lower end defining the shape of the foot; and an inner member of independently inflatable compartments welded together comprising a shin compartment (16) contacting the rigid pad and being of upwardly convergent profile, an inner spacer compartment (18) between the upper end of the shin compartment (16) and the patient's stump and an annular socket compartment (24) that surrounds the patient's stump and the shin compartment (16) and extends downwardly in overlapping relation around the upper end of the shin compartment (16) to resist bending of the limb at the false joint at the patient's stump.

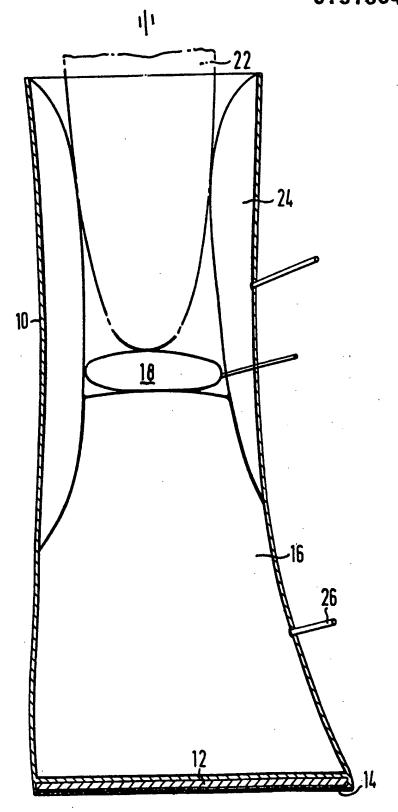





EUROPEAN SEARCH REPORT

EP 84 30 0689

DOCUMENTS CONSIDERED TO BE RELEVANT					OLAGOITIOATION OF THE	
ategory		th Indication, where appropr rant passages	iate,	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 2)	
х	GB-A-2 064 331 * abstract; fig 79 - page 2, li	ures; page 1,	line	1,2	A 61 F 2/60	
A	DE-A-2 026 825 * claims 1,8,9; line 25 - page	figure 6; pa		1-3		
E	GB-A-2 124 493 * whole documen).)	1-3		
	٠					
:					TECHNICAL FIELDS	
			,	ļ	SEARCHED (Int. Cl. 2)	
					A 61 F	
	,				n or r	
	·					
			·			
				·		
		•		,	·	
	The present search report has	been drawn up for all claims				
	Place of search	Date of completion			Examiner	
THE HAGUE 03-10-				STEENBAKKER J.		
Y: pa	CATEGORY OF CITED DOC articularly relevant if taken alone articularly relevant if combined vocument of the same category	E with another D	: theory or pri : earlier paten after the filin : document ci : document ci	it document, ig date ited in the ap	iying the invention but published on, or plication reasons	
A:te	chnological background on-written disclosure	ă.		he same pate	ent family, corresponding	
P: in	on-written disclosure itermediate document		document	ng sang þatt	an anny, wiresportung	